




Damit Ihnen nicht die Luft wegbleibt

## Maskdryinglocker „MTS 1800“

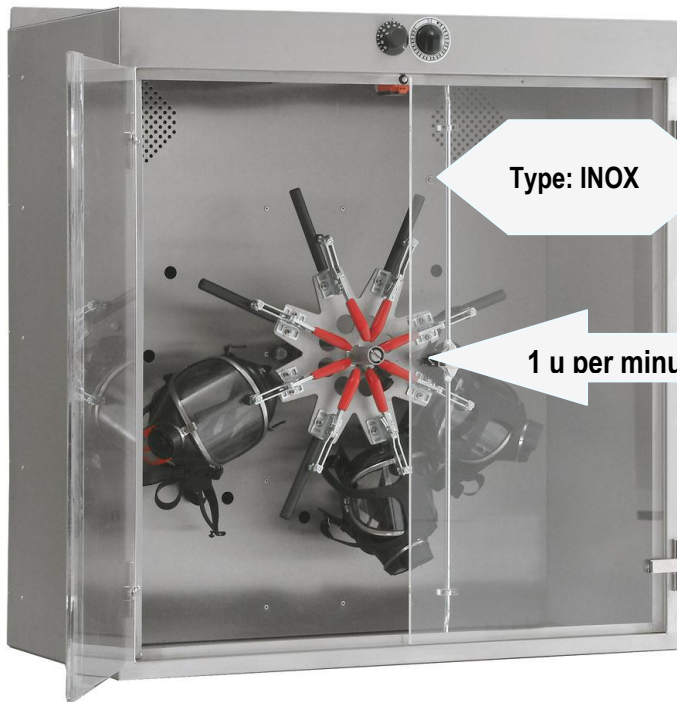

Type: INOX

1 u per minute (1 udm)



- Separate Time Regulator Switch
- Separate Temperature Control Switch
- Quick and Easy Clamping Method
- Simple and Practical System for hanging Masks and setting functions
- Switches off automatically when opened.
- Low electrical consumption (1100 watt)
- 230V /50 Hz

**Technical Details:** Mask Drying Cabinet made of stainless steel, with two doors, cylinder lock. L/W/H 900/530/900. Wall mounting.

**Mechanical/Tech. Details:** Integrated rotating disc with arms for up to 8 protective masks (different makes possible).  
Simple to hang and remove masks from the rotation disc.  
Time switch easy to set  
Compact and space-saving  
Safety precaution – switches off automatically when door is opened.  
Integrated warm air blower

**Electrical/ Tech. Details:** Voltage: 230V / 50Hz  
Max. electrical consumption 1,1 KW  
Maintenance-free warm air blower  
Maintenance-free stepping-gear motor 1/min

**Drying Time:** Due to the continual revolving motion of the masks, a gentle and efficient drying process is achieved. Drying time is recorded as being between 20 to 30 minutes.